


Tube PA, flexible

Technical data	
Lubrication technology::	Oil/grease for lubrication Hydraulic oil Other oils
Operating temperature:	from -40°C to 100°C
Temperature peaks:	max. 125°C If the peaks are significant in duration or frequency, the service life of the tube may be reduced.
Color:	black
Specification:	Standards DIN 74324 and 73378 (*only DIN 73378)

Pressure/temperature diagram PA tubes

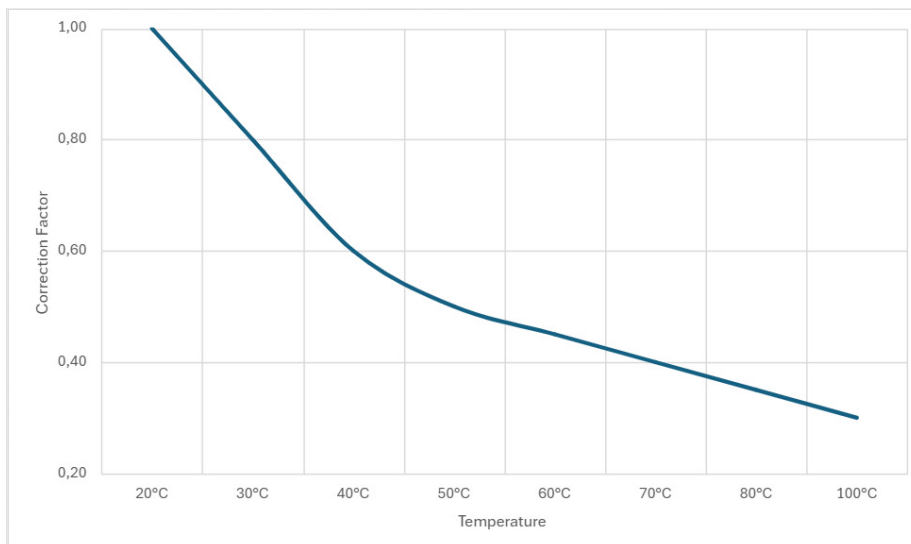

Safety notice

The use of tubes with a lower pressure resistance than the maximum pressure build-up of the lubricant pump used is not permitted!

Tube	ID in mm	OD in mm	Wall thickness in mm	Operating pressure in bar	Bending radius in mm	Weight in g/m
4 x 0,75*	2,50	4,00	0,75	90	36	7,7
6 x 1,0	4,00	6,00	1,00	90	50	15,9
8 x 1,0	6,00	8,00	1,00	90	102	22,2

Note

The tubes are also available pre-filled with grease

The above data and information correspond to the current state of knowledge and our development. However, they do not represent any assurance of properties or a guarantee for the suitability of the products in individual cases. We reserve the right to change the information in this technical data sheet at any time and without prior notice or to make technical changes.