





PU-Lubrication Pinion with axis

For relubrication of open gears

- + Operating temperature 0 °C to +120 °C
- + Light weight
- + Plain bearings
- + Geometry freely selectable
- + Special fastenings possible
- + Grease up to NLGI Class 2
- + Available with axle as a set (pre-oiled)
- + Stainless steel mounting axles

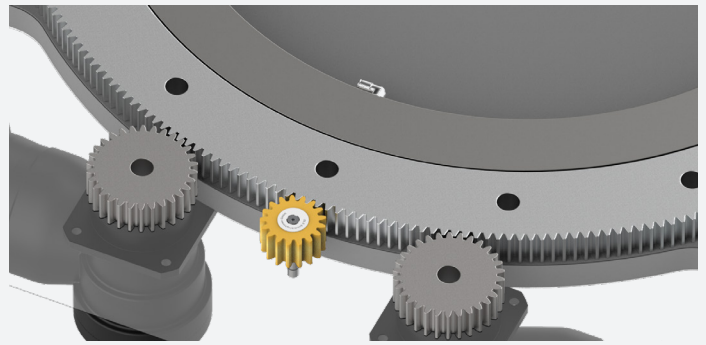

**- Designed by DLS -
Made in Germany!**

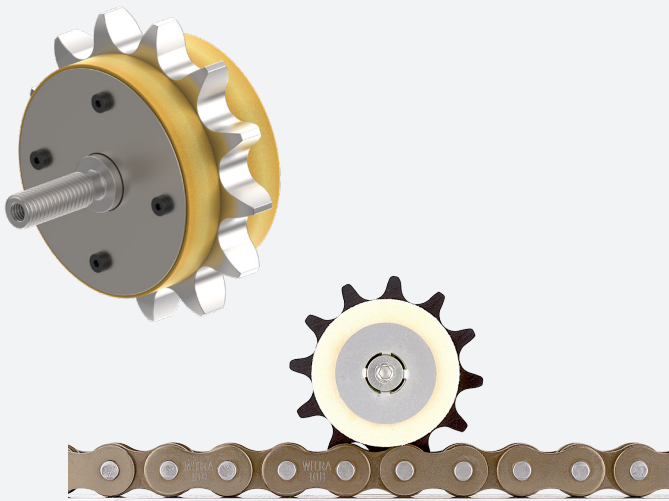

PU-Lubrication Sprockets

For relubricating chains

- + Speeds also > 2 m/s
- + Different fastenings
- + Plain bearings
(Rolling bearings on request)
- + For chain lubricating oils < 30,000 cSt
- + Very good emergency running properties
- + Up to size 32B

PU-Lubrication Rolls

For relubricating chains or rails for guides

- + For grease or oil lubrication
- + Grease up to NLGI Class 2 / Oil up to < 30,000 cSt
- + Diameter up to 600 mm
- + Contours freely selectable
- + Very good emergency running properties
- + Covers and enclosures on request
- + Accumulation conveyor chains also possible



Pumps for grease lubrication


- + Automatic relubricator
- + For grease and lubricants
- + Impulse or time controlled
- + up to 35 outlets; expandable through distribution system
- + different amounts of lubrication possible
- + For grease lubricants up to NLGI class 2
- + Delivery pressure up to 250 bar
- + Can be integrated into PLC with feedback
- + Installation position vertical (other installation positions on request)
- + different protection classes
- + large temperature range



Pumps for oil lubrication

- + Automatic relubricator
- + For oil lubricants
- + Battery, time or pulse controlled
- + Oil with an operating viscosity of 150 mm² /s
- + Delivery pressure up to 70 bar
- + Installation position vertical (other installation positions on request)
- + different protection classes
- + large temperature range



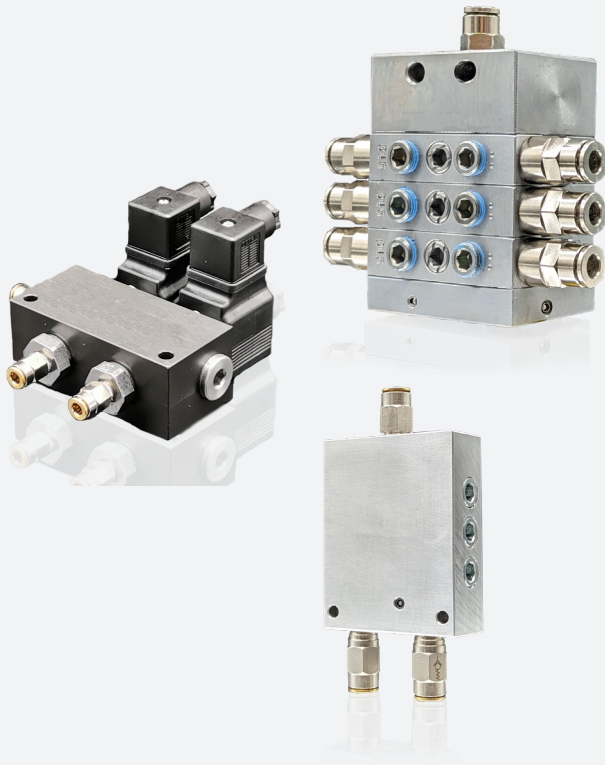

Distributors

For needs-based lubricant distribution

- + Different dosing volumes possible
- + High dosing accuracy of all distributors
- + For grease and oil lubricants



Cartridges

The right lubricant for every application!
Available from stock in many different container sizes




Tube connectors


For connecting the lubrication system to your lubrication point.

Accessories

Selected accessories for your applications.




**- Designed by DLS -
Made in Germany!**

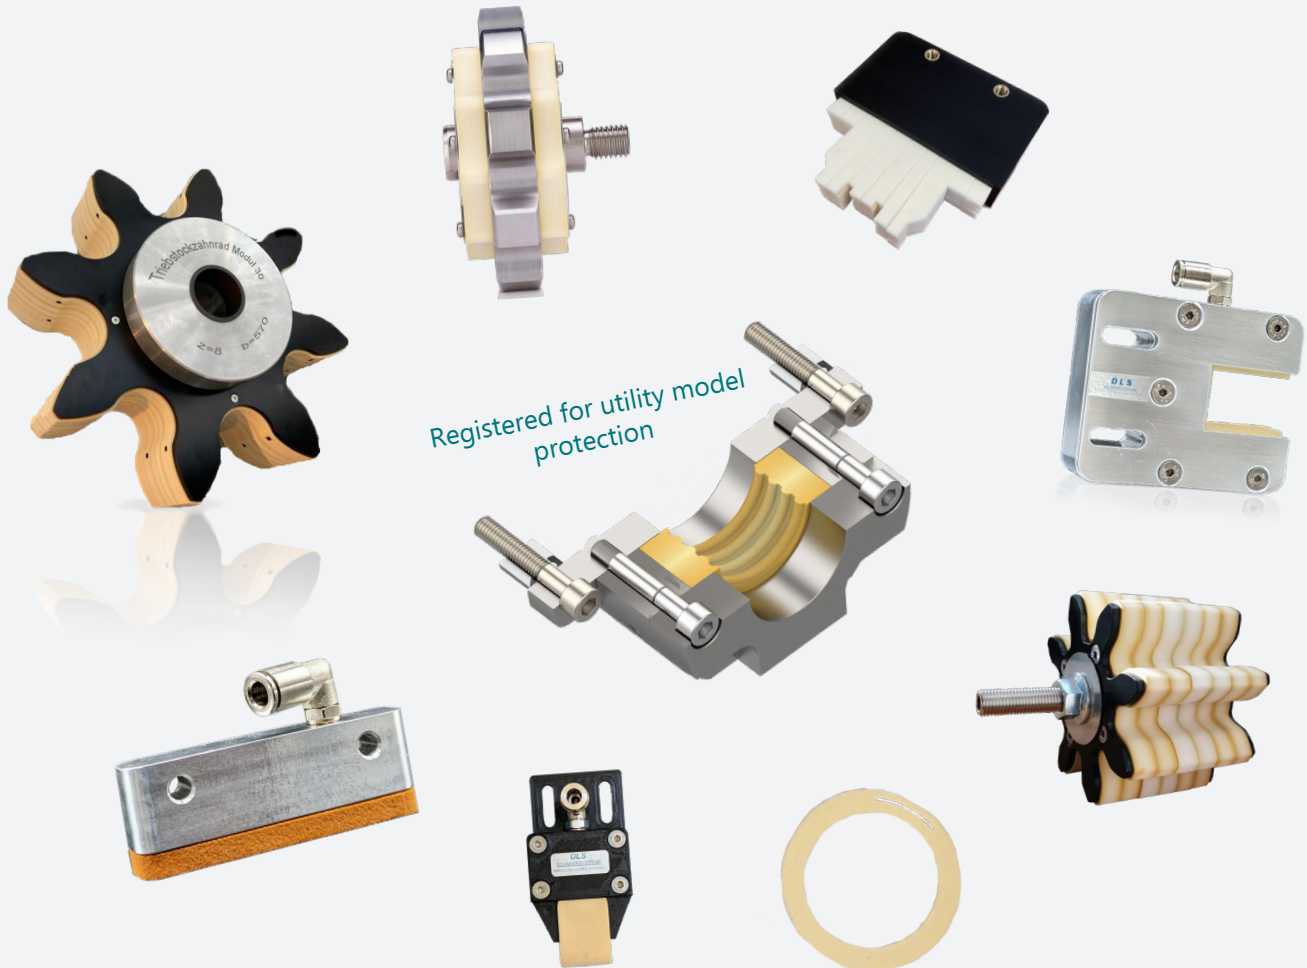

Registered for utility model
protection

From conception to on-time individual or series delivery:
All from a single source!
We advise you competently and solution-oriented directly on site!
Our team of experienced engineers and technicians looks forward to your challenges.

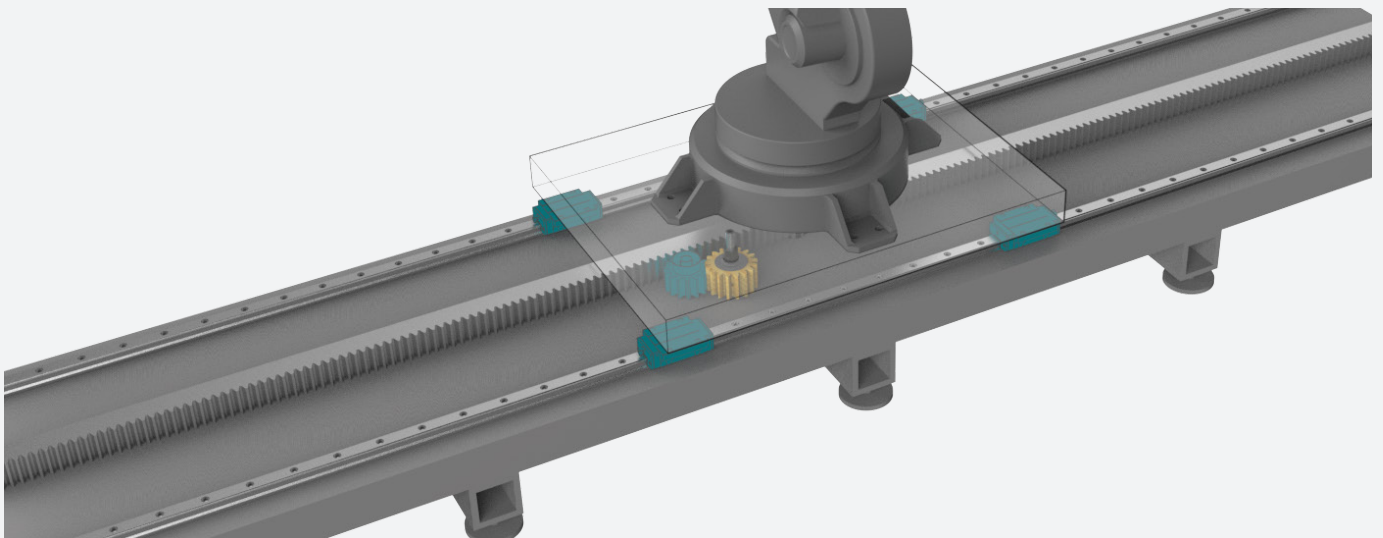

Address:

DLS Schmiersysteme GmbH
Gewerbering 5
82140 Olching
Deutschland



DLS Schmiersysteme GmbH
is certified according
to ISO 9001:2015.

Contact:

Phone +49 (0) 8142 650690
Mail mail@DLS-Schmiersysteme.com
order@DLS-Schmiersysteme.com
Internet www.DLS-Schmiersysteme.de



We are a successful training
company.

Sales Germany:

Mr. Achim Brandstätter

Phone: +49 8142 6506922
Mail: achim.brandstaeter@dls-schmiersysteme.com

Mr. Rainer Graf

Phone: +49 2824 9991967
Mail: rainer.graf@dls-schmiersysteme.com

Sales Worldwide:

Mr. Reiner Hochholzer

Phone: +49 8142 650690
Mail: reiner.hochholzer@dls-schmiersysteme.com

